




CUSTOMER TERMINAL	RoHS	LEAD(Pb)--FREE
Sn 96%, Ag 4%	Yes	Yes

more than you expect



ELECTRICAL SPECIFICATIONS @ 25° C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @ 20°C	ohms max.
D.C. RESISTANCE	8-7 @ 20°C	ohms max.
INDUCTANCE	2-4 10kHz, 100mV, Ls	30.00µH ±10%
LEAKAGE INDUCTANCE	2-4 tie(7+8), 100kHz, 100mV, Ls	µH max.
DIELECTRIC	2-8 5000VDC, 1 second	
URNS RATIO	(2-4):(8-7)	2:1, ±2%

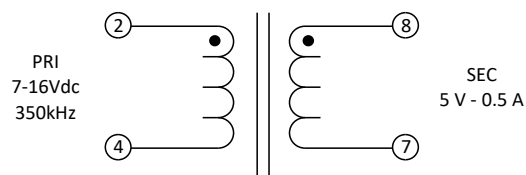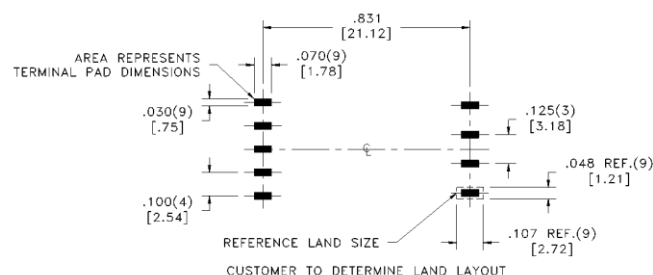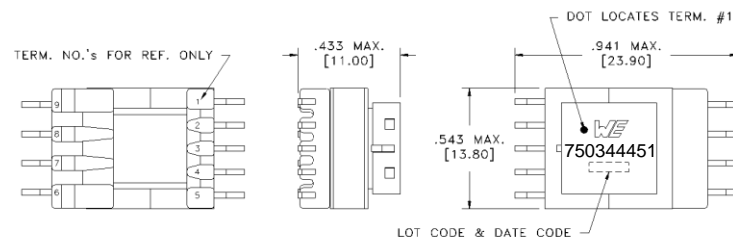

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.


Designed to comply with the following requirements as defined by IEC60601-1, EN60601-1, and UL60601-1:

- One means of patient protection at a working voltage 16Vpeak. Altitude up to 2000 meters.

Pinout Subject
to Change

Preliminary

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

DFM	Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750344451
DATE	Method: Tape & Reel				
ENG	HJH				
REV.	00				
DATE	2019/8/1	www.we-online.com/midcom		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	
				SPECIFICATION SHEET 1 OF 1	